



3061

用户手册  
User Manual

# 目录

3061规格参数	1
3061组合键功能	2
3061系统功能	3
3061S单色灯背光版本功能	4
Akko Macro V1.0宏定义功能说明1	5
Akko Macro V1.0宏定义功能说明2	6
Akko Macro V1.0宏定义功能说明3	7
Akko售后服务规范	8

# Menu


3061 Technical Specifications	9
3061 HotKeys	10
3061 System Commands	11
3061S Single-Color Backlight	12
Akko Macro V1.0 Macro Setup Instruction 1	13
Akko Macro V1.0 Macro Setup Instruction 2	14
Akko Macro V1.0 Macro Setup Instruction 3	15
Akko Warranty and Service Statement	16

# 3061 规格参数

尺寸	约292*101*37mm
重量	约0.5KG
产地	中国
类型	机械键盘
键帽	PBT材质
连接线	Type-C To USB
多媒体键	支持
全键无冲	支持
自定义按键	支持, 使用Akko Marco V1.0免驱宏录制系统。



# 3061 系统功能

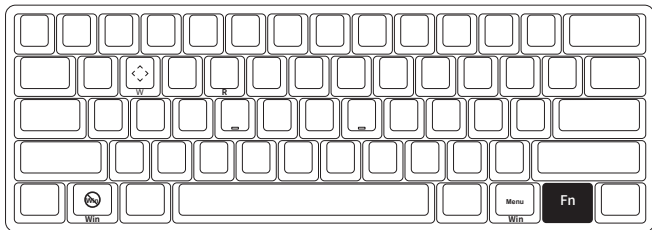

**Fn+ W (长按3S)**

将 W A S D  
与 ↑ ↓ ← → 键对调

**Fn+右Win+ R (长按3S)**

右Win变成Menu功能键,  
再长按切回

**左Win+右Win (长按5S)**


恢复出厂设置

**Fn+左Win/右Win**

按一下, 锁Win,  
再按一下解除锁Win状态

# 3061S 单色灯背光版本功能

\*背光功能仅针对3061S背光版有效

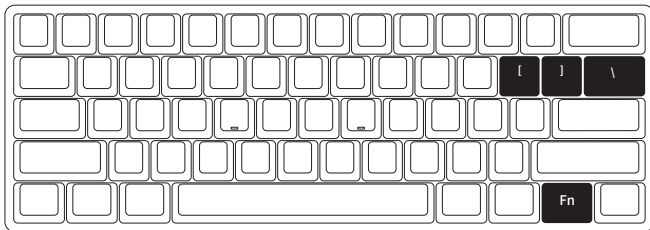


Fn+	[		灯光变暗
	]	=	灯光变亮
	\		常亮、呼吸、单点亮、单点灭、 波浪、涟漪、雨滴灯效循环切换

# Akko Macro V1.0宏定义功能说明 1

1. 自定义功能无需驱动软件, 根据说明操作可直接使用。
2. “Esc”, “Fn”, “左Win键”, “右Win键”四颗功能键无法自定义。
3. 自定义功能需要切换至自定义层 (长按Fn+Win 3秒) 方可使用, 在插拔键盘或者系统重启后, 键盘默认进入常规键位, 需要重新切换至自定义层使用自定义的按键。
4. 目前Akko Macro V1.0不支持同时触发, 即“AB”同时按下依然以A, B顺序触发。
5. 目前Akko Macro V1.0不支持自定义间隔时间, 即无法定义A, B之间的间隔, 不论你按的快或者慢, 都会以系统默认的触发时间定义。



# Akko Macro V1.0宏定义功能说明 2

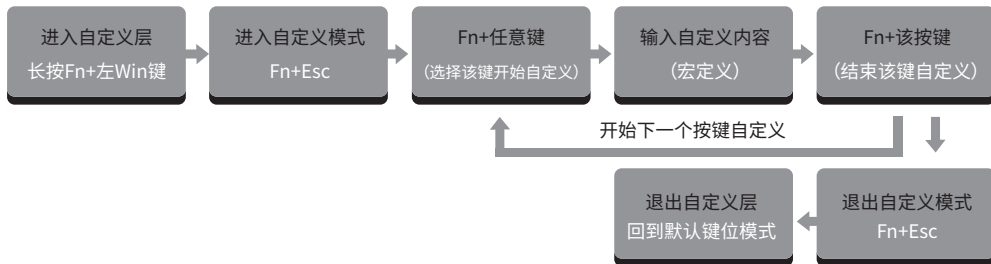

## 清除宏：

如果该按键已经进行了自定义，当进入自定义模式后，按下FN+该按键则会清除该按键的宏。  
如果要对该按键重新进行自定义，则在清除宏后再按照正常步骤按下FN+该键，开始自定义。

# Akko Macro V1.0宏定义功能说明 3

## 宏定义示例：将A定义成 akkogear

第一步：长按Fn+左Win 3秒，进入自定义层

第二步：按Fn+Esc，开始宏定义

第三步：按Fn+A，选择A开始宏定义

第四步：按照顺序按下a,k,k,o,g,e,a,r

第五步：按Fn+A，结束A的宏定义

此时，按A就会显示akkogear，如果您还要对B进行宏定义，按下Fn+B，开始B的宏定义

第六步：按Fn+Esc退出宏定义

在自定义层下，就可以操作您设置的键位和宏了

第七步：长按Fn+左Win 3秒，退出自定义层，回到默认键位

# Akko 售后服务规范

1. Akko机械键盘享受非人为损坏1年保修服务, 即从购买日起, 1年以内免费维修。
2. 如超过条款1的保修期限, Akko官方将收取不超过市场平均价格的费用提供维修服务。
3. 用户自行拆开键盘视为放弃免费维修服务, 即使1年内损坏, 也按照售后服务条款2执行。
4. 不同销售平台的特殊服务条款, 以购买平台规则为准。

## 注意 事项

人为损坏不局限于键盘进水、高处坠落、过度用力拉扯线材等, 键盘为电子产品, 请按照电子产品保护方式爱惜使用。

售后电话: 0755-27728007

售后QQ: 981572876


\*官方售后服务时间为每周一至周五上午10:00至下午18:00, 节假日以国家法定节假日休息为准。

\*因受维修时间, 物流时间, 零件采购时间等不可控因素, 售后时间会有不同, 以实际损坏情况评估为准, 请用户耐心等待。

# 3061 Technical Specifications

Dimensions	292 x 101 x 37mm
Weight	Approximately 0.5KG
Country of Origin	China
Type	Mechanical Keyboard
Keycap	PBT Material
Interface	Type-C To USB
Multimedia Keys	YES
N-Key Rollover	YES
Custom Keys	YES (use Akko Marco V1.0)

# 3061 HotKeys

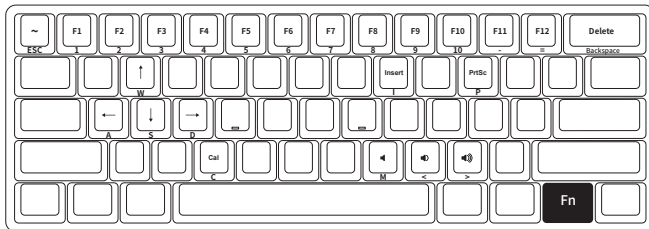


Fn+	ESC	=	~
	1 - 0		F1 - F10
	-		F11
	=		F12
	Backspace		Delete

Fn+	W	=	↑
	A		←
	S		↓
	D		→
	I		Insert

Fn+	P	=	PrtSc
	C		Calculator
	M		Mute
	<		Decrease Volume
	>		Increase Volume

# 3061 System Commands

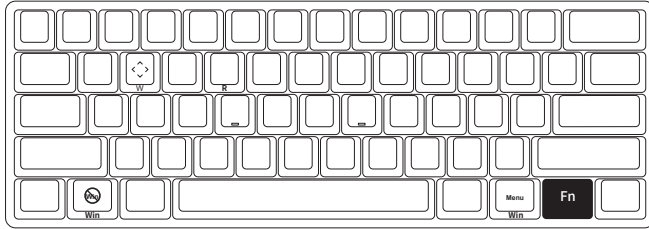

## Fn+W (Long press 3S)

Swap W A S D with ↑ ↓ ← →.

## Fn+Right Win+ R (Long press 3S)

Switch to right Win key to become the Menu key. Press and hold to switch back.

## Left Win+Right Win (Long press 5S)


Restore to the factory settings.

## Fn+Left Win/Right Win

Press to lock the Win key and press again to unlock.

# 3061S Single-Color Backlight

\*Backlight function is only available on the backlight version of 3061S.

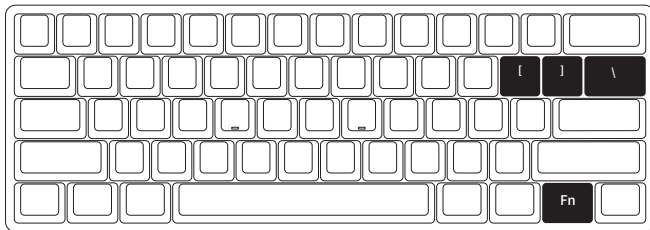

Fn+	[	=	Dim
	]		Bright
	\		Lighting effects cycles among Steady / Breathe / One-key light up / One-key light off Wave / Ripple / Raindrop

# Akko Macro V1.0


## Macro Setup Instruction 1

1. Akko Macro V1.0 is hardware-based and works without software-driven.
2. The following keys cannot be programmed: "Esc", "Fn", "Left Win" and "Right Win".
3. Press and hold Fn + Win for 3 seconds to switch to the Macro mode. When the keyboard is re-connected or the system is restarted, the Macro mode will be exited. You need to switch to the Macro mode again to use programmed keys.
4. Akko Macro V1.0 does not support simultaneous trigger, that is, pressing "AB" at the same time will trigger the two keys in the order of A followed by B.
5. Akko Macro V1.0 does not support customized interval time, that is, the trigger interval between key A and key B cannot be defined and will follow the system's default trigger time.



# Akko Macro V1.0

## Macro Setup Instruction 2

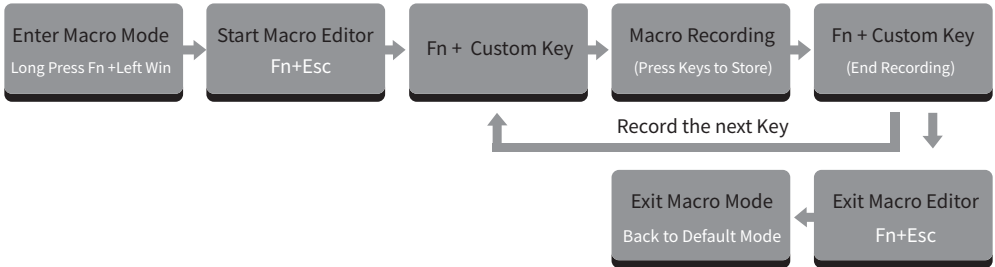

### Clear Macro:

If a key has been defined, after entering the Macro editor, you can press “FN + the key” to clear its definition.

If you want to re-customize that key, press “FN + the key” again to start the new Macro recording after clearing its old definition.

# Akko Macro V1.0

## Macro Setup Instruction 3

### Macro Recording Example: Define “A” as “AKKOGEAR”

Step 1: Press Fn + left Win for 3 seconds to enter the Macro mode.

Step 2: Press Fn + ESC to launch Macro editor.

Step 3: Press Fn + A. This means we choose key “A” to record.

Step 4: Press A, K, K, O, G, E, A, R in order as replacement definition of “A”.

Step 5: Press Fn + A again to end the Macro recording of key “A”.

At this point, pressing “A” in notepad will display “AKKOGEAR”.

If you want to create a Macro for key “B”, press Fn + B to start the Macro recording.

Step 6: Press Fn + Esc to exit Macro editor.

Under the Macro mode, you can configure the keys and Macros you set.

Step 7: Press and hold Fn + Left Win for 3 seconds to exit the Macro mode and return to the default key definition.

# Akko Warranty and Service Statement

1. Akko provides 1-yr warranty for customers in mainland China. For other regions, please contact your seller (Akko distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. Akko will also provide instructions if users prefer to repair the keyboard by themselves. However, users shall take full responsibility for any loss happened during self-repair.
3. Disassembling the keyboard without manufacturer/seller's instruction will immediately void the warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

## Precautions

Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.

